

INSTRUCTIONS

In order for you to obtain maximum benefits, the surface to be treated must be thoroughly clean prior to applying EnduroShield. This means that all soap scum, mineral deposits, and dirt must be removed.

Please note: New tiles still requires cleaning to ensure that the surface is completely clean and free of small particles in preparation for the treatment.

Scan to view the 'How to' application video.
Or visit www.enduroshieldusa.com



Scan to view video

Please note:


- If working on exterior tile and grout, it is best to do the work in the shade to reduce the rate of evaporation and reduce streaking.
- Do not apply if it is raining as water can inhibit the bonding during the application process.
- EnduroShield must only be applied in ambient temperatures between 50°F (10°C) and 86°F (30°C).

TO UNLOCK SPRAYERS

For the safety of you and your family, our sprayers are all equipped with a child-lock.

To unlock, press the button on the neck inwards until it clicks, as shown in the picture. The sprayer is now unlocked.

Please remember to lock the sprayer after use!

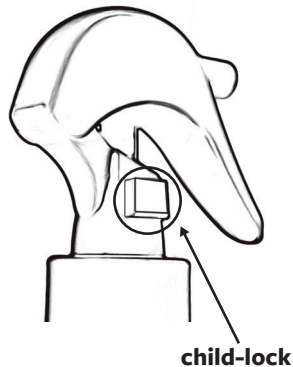

CLEANING THE TILE & GROUT

1. Working in a well-lit and ventilated area, liberally spray the EnduroClean™ pre-cleaner to a small section of tile and grout of approximately five square feet (½m²).
2. If treating old tile and grout, use the Scrubbing Pad provided and scrub the sprayed area using light to moderate pressure to remove any build-up of soap scum, water scale deposits, dirt, and grime.
Hint: Looking at the tile and grout from different angles will reveal the areas that need the most work.
3. Polish the tile area with a clean cotton rag or paper towel (not the Application Cloth provided) until all streaks are removed and the tiles have a shiny new appearance.

4. Move on to the next section of tile and grout, overlapping a little so that no area is missed, and repeat steps 1 to 3. Continue this process until the entire tile and grout area is clean and dry. A second application and polish of EnduroClean™ Pre-Cleaner is recommended for tile and grout areas that are not new.

TREATING THE TILE & GROUT

5. Shake the bottle of EnduroShield before using. Hold the bottle of EnduroShield approximately 4" from the surface and spray a liberal amount over the lines of the grout and then over the tiles ensuring an even coverage of approximately 5ft² (½m²) at a time.
Hint: It is better to use more product than not enough.

6. Using the Application Cloth in the packet provided, wipe over the sprayed area from side to side and up and down, being sure to spread the product evenly over the 5ft² (½m²) area being worked. Be sure to wipe to the edges or corners. When you first start spreading EnduroShield it will appear oily, and will become clear as you work it. Making sure that no area is missed, continue wiping the surface until the Application Cloth glides easily.

7. Move onto the next section of tile and grout, overlapping a little so that no area is missed, and repeat steps 5 & 6. Continue this process until the area is treated.

Hint: Wiping over the area for an extra minute or two is recommended for optimal results.

8. As a final step you may want to use a clean microfiber cloth to buff any remaining streaks from the surface.

The application is now complete. Allow the tile and grout to cure for 8 hours before allowing it to come in contact with chemicals such as cleaners, soaps, or shampoos.

Hint: If it rains immediately after the application process, this will not affect the coating on exterior tile and grout.

MAINTAINING THE TILE & GROUT

Congratulations, now the job of cleaning your tile and grout has become much easier.

Cleaning the EnduroShield treated tile and grout: When cleaning your treated tile and grout be careful not to use any rough, gritty, or abrasive cleaners, as you may damage the treatment. For best results use water and a mild detergent (such as dish washing liquid or soap) with a damp microfiber cloth, and then dry the surface with a squeegee that has a good quality soft rubber blade. Poor quality rubber can be abrasive to the treatment. Refer to the care instructions page at www.enduroshieldusa.com for a list of approved squeegees.

Cleaning Frequency:

Shower tile and grout – Clean each week

Other Tile - Internal and external such as backsplashes, wall and floor tiles can be cleaned as required.

For areas with hard water or bore water, due to a higher concentration of mineral deposits such as lime and calcium, a build-up may occur on the treatment that may not be easily removed with a mild detergent. In these conditions a solution of white vinegar and water (1 part vinegar to 5 parts water or stronger) must be used with a damp microfiber cloth to remove them.

Hint: Give the tiles and grout a quick squeegee to reduce the water droplets from drying and leaving behind any mineral deposits.

Warning: The EnduroShield treatment can be affected by cleaning products containing strong alkalis and by modern mold removing agents containing a combination of bleach and sodium hydroxide. Avoid these and use alternatives such as pure white vinegar or diluted tea tree oil to treat mold on tile and grout areas.

FREQUENTLY ASKED QUESTIONS

On old tiles, what if I can't remove all of the cloudiness or etching?

Old tiles could be permanently stained, and you will not be able to remove all of the cloudiness or etching from the surface. However, EnduroShield® will help prevent it from deteriorating any further, and it will be much easier to keep clean.

Does the area to be treated need to be masked?

No, the product is not corrosive and will not harm fixtures, frames or fittings. In fact, it will render the surfaces water repellent for a period of time.

What happens if I do not remove all the streaks from the surface after applying EnduroShield®?

The streaks will disappear when the tile is next cleaned.

Should the water bead on the tile and grout?

Yes, EnduroShield® creates a water and oil repellent surface which results in the water beading on the surface.

Will the surface become patchy if the treatment is worn off in any way?

No. The treatment is only two molecules thick and transparent, thus it does not change the appearance of the surface. If an abrasive was used, where the treatment has worn away would not be visible. That area would, however, be harder to clean. The untreated surface can be easily repaired by cleaning and re-treating with EnduroShield®. The EnduroShield molecules will bond to the untreated tile surface.

WARRANTY

PCT Global LLC warrants that EnduroShield® will resist water and oil based stains for a 3 year period from the date of its application. This warranty only applies if the application of EnduroShield is done in accordance with directions and instructions given by PCT Global LLC and the application takes place within 18 months from the date of manufacture. If EnduroShield does not, in these circumstances, remain water and stain resistant for the 3 year period then PCT Global LLC will replace the appropriate quantity necessary for re-application to the warranted area, or provide a refund of the purchase price. This warranty is given by PCT Global LLC whose details are set out below:

Address: PO Box 20274 Santa Barbara CA 93120 USA

Customer Service: Telephone: 1-805-617-4609

Email: serviceusa@enduroshield.com

You will bear all costs and expense in making a claim under this warranty. To make such a claim you should send to PCT Global LLC by mail or email the following:

- The barcode of the DIY kit the subject of the claim;
- The original receipt of purchase;
- A brief explanation of the problems giving rise to the claim; and
- Your contact details including telephone number.

You should allow up to 3 to 4 weeks for your claim to be processed by PCT Global LLC.

For best results EnduroShield should be used within 18 months of the manufacturer date, after which the warranty is invalid. The manufacture date is contained in the Batch or Lot code on the EnduroShield bottle. The first character of the code is "B". The 2nd is the "year" (3 =2013, 4= 2014 etc.) and the 3rd & 4th is the month ("01" is January, "02" is February).

The sole and exclusive maximum liability of PCT Global LLC under this warranty will be to replace the appropriate quantity necessary for re-application to the warranted area, or provide a refund of the purchase price.

THE EXPRESS WARRANTIES SET FORTH IN THIS PURCHASE ARE IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT

LIMITATION, ANY WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. You agree that your exclusive remedies and the entire liability of PCT Global LLC with respect to the EnduroShield DIY kit, are set forth in this agreement. PCT Global LLC will not be liable to you for any damages, including any lost profits or other incidental or consequential damages arising out of your use of the EnduroShield DIY kit or the breach of any warranty. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. You will bear all costs and expense in making a claim under this warranty.

WORKS ON NEW & TILES & GROUT

- ✓ Shower Walls
- ✓ Wall & Floor Tiles
- ✓ Polished Porcelain Tiles
- ✓ Vitreous China - Sinks
- ✓ Vitreous China - Toilets
- ✓ Kitchen Backsplashes
- ✓ Tiled Benchtops

Not appropriate for natural stone or travertine

OTHER ENDUROSHIELD PRODUCTS AVAILABLE:

- EnduroShield® kit for Glass
- EnduroShield® kit for Stainless Steel & Chrome

PCT GLOBAL LLC

SANTA BARBARA CA 93120 USA

Customer Service: +1-805-617-4609

MADE IN AUSTRALIA

PACKAGED IN USA

www.enduroshield.com



Scan to view video